



CA/LINE

IN-LINE CIRCULAR
KANALSKI VENTILATORI



CA/LINE

*Inline kružni ventilatori za kanale sa
dugotrajnim kugličnim ležajevima*



ventilator:

- Kućište od čeličnog lima
- Eksterna terminalna ploča
- Brza i jednostavna instalacija
- Uključuje postolje



Veličina 355

motor:

- Podesivi motor sa dugotrajnim kugličnim ležajevima i IP54 zaštitom
- Monofazni 220-240V. 50 Hz
- Radna temperatura: -25°C +60°C

Završna obrada

- Antikorozivna završna obrada u poliesterskoj smoli polimerizovanoj na 190°C, nakon alkalnog odmašćivanja korišćenjem nanotehnološkog tretmana bez fosfata.

Na zahtjev:

- Modeli na 60 Hz

Šifra narudžbe



Tehničke karakteristike

Model	Brzina (o/min)	Maksimalno dozvoljeno struja 230V (A)	Apsorbovano električna energija (kW)	Maksimum protek vazduha (m³/h)	Zvuk nivo pritiska dB(A)	Pribl. težina (Kg)
CA/LINE-10	2460	0,35	0,074	260	33	2.8
CA/LINE-12	2350	0,35	0,075	350	35	2.8
CA/LINE-15	2420	0,44	0,095	537	41	4.8
CA/LINE-16	2640	0,62	0,133	880	41	4.8
CA/LINE-20	2600	0,64	0,137	980	36	6.2
CA/LINE-25	2390	0,72	0,157	1008	38	6.6
CA/LINE-31	2378	0,86	0,189	1596	37	6.9
CA/LINE-355	2098	1.56	0,357	2098	39	12

Akustične karakteristike


Navedene vrijednosti su određene na osnovu mjerenja nivoa zvuka u slobodnom polju u dB(A) na udaljenosti od 3 m.

Spektar zvučne snage Lw(A) u dB(A) preko frekventijskog pojasa u Hz.

Model	63	125	250	500	1000	2000	4000	8000
10	7	23	16	33	45	44	37	26
12	8	17	18	34	43	41	33	22
15	10	19	38	40	49	41	40	24
16	10	19	38	40	49	41	40	24

Model	63	125	250	500	1000	2000	4000	8000
20	11	13	21	35	41	36	46	38
25	14	21	29	36	39	37	38	38
31	12	20	29	36	36	39	38	35
355	12	17	29	37	39	40	39	38

Dimenzije u mm

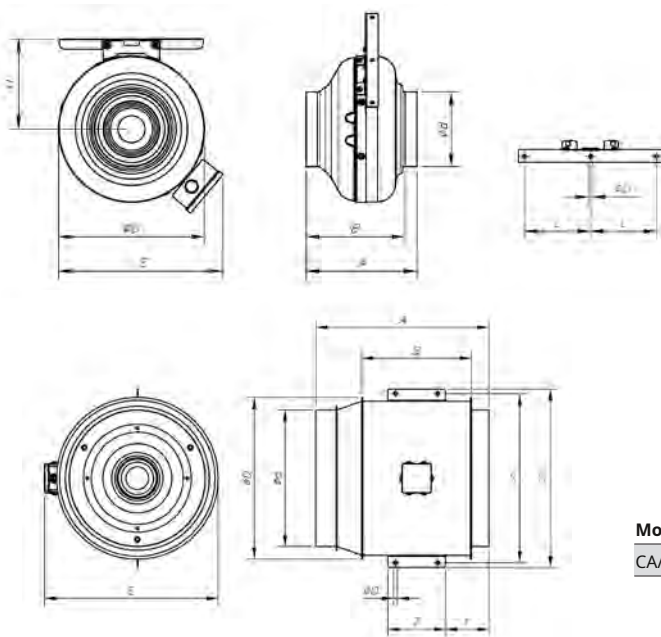




Model	A	B	ød	øD	E	H	L	øO
CA/LINE-10	200	178	100	268	318	141	80	12
CA/LINE-12	200	178	125	268	318	141	80	12
CA/LINE-15	269	244	150	342	392	178	80	12
CA/LINE-16	269	244	160	342	392	178	80	12
CA/LINE-20	269	229	200	342	392	178	80	12
CA/LINE-25	279	229	250	342	392	178	80	12
CA/LINE-31	295	245	315	400	450	207	80	12

Model	A	B	ød	øD	E	øO	x	X	Y	Z	
CA/LINE-355	450	352	354	420	470		10	442	466	135	110

Karakteristične krive

Q= Protok vazduha u m³/h, m³/s i cfm

Pe= Statički pritisak u mmH₂O, Pa i inwg

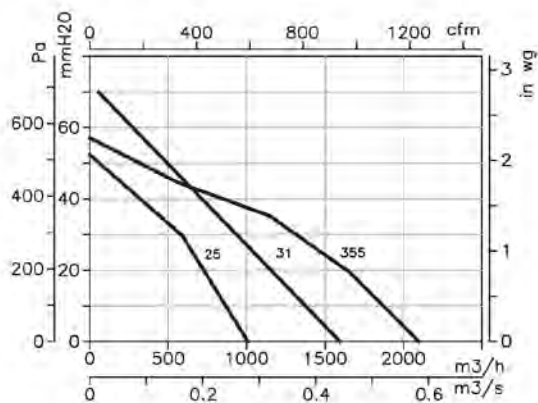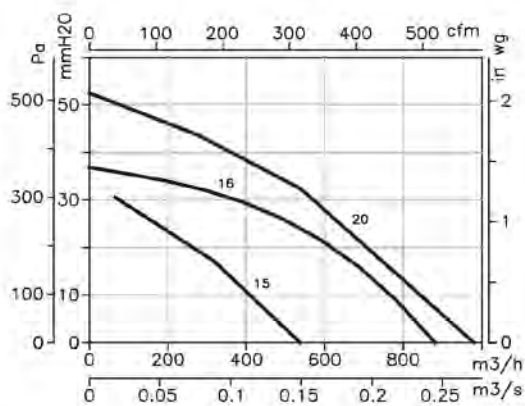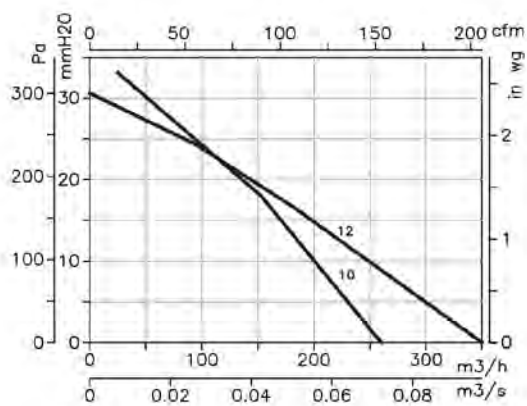

EFIKASNI VENTILATORI RADA



AXIAL
FANS AND
ROOF FANS



CENTRIFUGALNO
VENTILATORI I LINIJA IZVLAČIVAČI



FANS FOR
SMOKE
EKSTRAKCIJA



ATEX VENTILATORI ZA
EKSPLOZIVNE ATMOSFERE I DRUGO
APLIKACIJE



POVRATAK TOPLOTE
SISTEMI I
FILTRACIJSKE JEDINICE



ZRAČNE ZAVJESE ZA
KOMERCIJALNI I
INDUSTRIJSKE PRIMJENE



VENTILACIJSKI SISTEMI
ZA
KUĆE



ZA DALJE
INFORMACIJE

www.sodeca.com



Distribuiru:



SODECA

Ctra. de Berga, km 0,7
E-08580 SANT QUIRZE
DE BESORA
Barcelona - ŠPANIJA
Tel. +34 93 852 91 11 Fax
+34 93 852 90 42
ventilation@sodeca.com



PORTUGAL

Sodeca Portugal Lda
Luiz Araújo
Rua Veloso Salgado 1120/1138
4450-801 LEÇA DE PALMEIRA
PORTUGAL
Tel. +351 229 991 100
Fax. +351 229 991 119
geral@decflex.com

FINSKA

Sodeca Finland Oy
Gospodin Kai Yli-Sipilä
Metsälinnankatu 30, PL2,
FI-32700 HUITTINEN, FINSKA Tel.
+ 358 2255 7582
orders.finland@sodeca.com

CHILE

Sodeca Ventiladores Ltda
S. Francesc Bertran
Avda. Puerta Sur 03380 San
Bernardo, SANTIAGO, CHILE
Tel. +56 (02) 2840 5582
ventas.chile@sodeca.com

ÁREA CARIBE

Residencial Miramar Apto. N° 108
Ave. 7ma N° 1805 entre 18 y 20.
Miramar Playa,
CIUDAD DE LA HABANA, KUBA
Tel. 00537 20 43721
sodeca@sodeca.co.cu